

## **Product information**

# **IIoT Gateway**

CC300T











(valid from 11/2018)

## Changes to older versions of this document

**Rev. 01**  $\rightarrow$  **02:** First steps outsourced to a separate document

**Rev. 02**  $\rightarrow$  **03**: New front foil drawing and information for data security added

**Rev. 03**  $\rightarrow$  **04**: Information for disposal of old equipment



## Technical data

#### S7-IIoT-Gateway for 35mm DIN-rail

### Standard configuration:

#### **Ethernet with**

- RFC1006
- (S7-communication),
- Send/ Receive via TCP and UDP,
- Modbus TCP

#### Run/Stop switch

#### State LEDs for

Power, Battery, Error, Run

#### **Inserting stripes**

- for Logo and identification (thereby customized adaption possible easy)

## on demand :

#### RS232 with

- Modbus-TCP

#### RS485 with

- Modbus RTU
- with switchable teminate resistors for RS485

#### CAN

- protocol compatible to
- CANopen®
- with switchable teminate resistors for RS485

#### Scope of delivery:

- Grounding terminal
- Technical data sheet

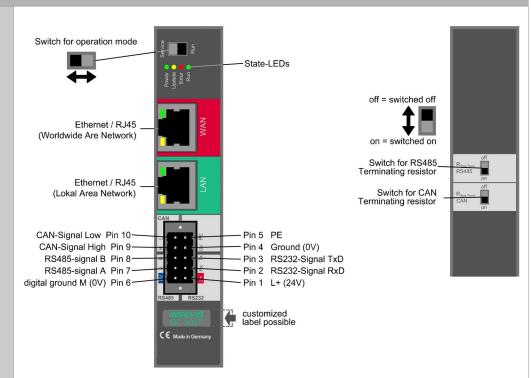


Image: view of GC300T

For handling  $\rightarrow$  please see present manual S7-IIoT-Gateway



| Technical data   |  |  |
|--|--|--|
| Dimensions W x H x D (mm) Cut out W x H (mm) Protection class Weight | 28 x 116 x 84<br>35mm DIN rail<br>IP41<br>ca. 350g   |  |
| Operating temperature range Storage temperature range                | -20°C +60°C (without condensation)<br>-30°C +80°C  |  |
| Connection technology  | removable connector with 2 bolt flanges aside (cage clamp technology) for cross section up to max. 1,5mm <sup>2</sup>  |  |
| Load voltage L+  | 24V DC (11 V 30V DC)   |  |
| Start-up current   | < 3A   |  |
| Technical data   | CPU  |  |
| CPU-type   | Type T (GC300T/TW)   |  |
| internal memory  | 4 GByte, of which approx. 1 GByte for user data (shared media usage of WebVisu, trend, alarm/event archive, OPC UA history, NodeRED applications)                              |  |
| Configuration  | Via integrated web configurator  |  |
| Programming languages<br>Programming system                          | JavaScript<br>Node-RED   |  |
| Serial interfaces (protocols)  | COM1: RS 232 (via Node-RED)<br>COM2: RS 485 (via Node-RED)   |  |
| Ethernet (protocols)   | ETHERNET: 10/100 MBit<br>S7-communication (active put/get), Modbus-TCP<br>(more by Node-RED)   |  |
| OPC UA Server  | Predefined namespace,compatible to S7-1500 + max. 2000 user-variables alternatively user defined namespace with external modeler (via binary data export) optionally OPC UA DI |  |
|  | able to provide datapoints from all other interfaces including history history configurable in sample time and number of samples   |  |
| SecurityPolicy   | subscriptions: max. 8<br>monitored items per subscription: max. 500<br>monitored items total: max. 1000  |  |
|  | none / Basic 256 Sha 256 sign / Basic 256 Sha 256 sign & encrypt<br>(can be enabled and disabled separately)   |  |
| MQTT   | Client (subscriber / publisher)  |  |
| Node-RED   | performance limit approx. 50 variables actualise cyclic data points from all other interfaces  |  |
| CAN (protocols)  | Baudrate 10 kBaud 1 MBaud – via Node-RED   |  |
| Data security  | open source packages OpenSSH and OpenVPN   |  |

| Order data of the assemblies  |              |  |
|---|--------------|--|
| Product designation   | Order-No.    |  |
| S7-IIoT-Gateway GC300T  | GC300T-0-03  |  |
| S7-IIoT-Gateway GC300TW (with optional web visualisation - cannot be retrofitted) | GC300TW-0-03 |  |

| Order data of the accessories         |             |  |  |
|---------------------------------------|-------------|--|--|
| Product designation                   | Order-No.   |  |  |
| Steckverbinder 2x5polig (Bolt flanges | E-CONS10-00 |  |  |



All devices described in this manual may only be used, built up and operated together with this documentation. Installation, initiation and operation of these devices might only be done by instructed personnel with certified skills, who can prove their ability to install and initiate electrical and mechanical devices, systems and current circuits in a generally accepted and admitted standard.

#### Manuals, sample programs

Additional documentation by manuals is available as well sample applications at the download area of www.insevis.com in English language for free download.

This and all other documentation and software, supplied or hosted on INISEVIS web sites to download are copyrighted. Any duplicating of these data in any way without express approval by INSEVIS GmbH is not permitted. All property and copy rights of theses documentation and software and every copy of it are reserved to INSEVIS GmbH.

INSEVIS refers that all trade marks of particular companies used in own documentation are reserved trade marks are property of the particular owners and are subjected to common protection of trade marks.

#### Disclaimer

All technical details in this documentation were created by INSEVIS with highest diligence. Anyhow mistakes could not be excluded, so no responsibility is taken by INSEVIS for the complete correctness of this information. This documentation will reviewed regularly and necessary corrections will be done in next version. With publication of this data all other versions are no longer valid.

Do not throw old appliances in the household waste! In the interest of environmental protection, old appliances must be collected separately from unsorted municipal waste. You can find out more about the proper disposal / return of your old appliance at <a href="www.insevis.com/disposal">www.insevis.com/disposal</a>. Attention: The deletion of personal data on the old devices to be disposed of is the responsibility of the end user.

With publication of this information all other versions are no longer valid.

Am Weichselgarten 7
 D-91058 Erlangen